


## Blixer® 4

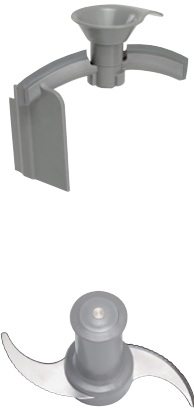

4.5 L

**A** SALES FEATURES

The **Blixer 4** can turn small amounts of cooked or raw ingredients into texture-modified meals (soft, puréed or liquid) in seconds.

**B** TECHNICAL FEATURES

Blixer 4. Single-phase. Power: 1.5 HP. Speed 3450 rpm. 4.5 L stainless-steel bowl with handle, plus bowl-base, fine-serrated, twin-blade assembly. Totally leakproof lid with scraper arm. 2 – 15 portions (7 oz).


Select your options at the back page, **F** part.

**C** TECHNICAL DATA

Output power	1.5 HP
Electrical data	120V/60/1 - 11 Amp
Speed	3450 rpm
Dimensions (WxDxH)	8 11/16" × 11 7/8" × 18 1/2" - Cube: 2.11
Rate of recyclability	95%
Net weight	34 lbs
Nema #	5-15P
Reference	BLIXER 4 - 120V/60/1

**D**

Number of 7 oz. portions per service



Amount processed per operation

.75 to 6.5 lbs

**E** PRODUCT FEATURES / BENEFITS**MOTOR UNIT**

- **Industrial direct-drive (no belt) induction** motor designed for intensive use
- Power 1.5 HP
- Stainless-steel motor shaft
- All-metal motor base
- Magnetic safety system, thermal failsafe and motor brake
- **Single speed 3450 rpm**
- **Pulse function** for greater cutting precision

**BLIXER® FUNCTION**

- **4.5 L stainless-steel bowl** with handle for better grip.
- **Bowl-base blade assembly** with two high-strength, stainless-steel, fine-serrated blades for homogeneous processing – even for small amounts.
- **Central lid opening** for adding liquid or solid ingredients during processing.
- High heat and shock-resistant **see-through lid** to monitor processing from start to finish.
- Leakproof lid and bowl unit with bowl scraper arm and lid wiper.
- All parts are dishwasher-safe and can easily be removed for cleaning.

**STANDARD ATTACHMENTS**

- 4.5 L bowl with lid.
- Bowl scraper arm and lid wiper.
- Blade assembly with two fine-serrated, stainless-steel blades and a detachable cap.

**STANDARDS**

ETL electrical and sanitation Listed/ cETL (Canada)



## Blixer® 4

**F** OPTIONAL ATTACHMENTS

- Stainless steel bowl assembly – Ref. 27338
- Replacement stainless steel fine serrated edge "S" blade Ref. 27349

**G** ELECTRICAL DATA

120V/60/1 - delivered with cable and plug

