

Equipment for the Foodservice Industry value + quality + service

Top Mount Reach-in Glass

**Door Refrigeration** 

C1-29GDSVC



C1-29GDSVC

Features

### Features:

- Top mount compressor units
- Environmentally friendly R290 refrigerant
- Led lighting interior display system
- Dixell digital temperature control system
- Heavy duty Embraco compressor
- Self-closing and stay open door
- Efficient refrigeration system
- Recessed door handle
- Standard safety door lock
- Magnetic door gaskets
- Pre-installed casters
- Pre-installed shelves

### Warranty:

 Two year parts and labour; Five years on compressor. For full warranty details visit https:// www.efifoodequip.com/warranty-info.php











## C1-29GDSVC

# Specifications

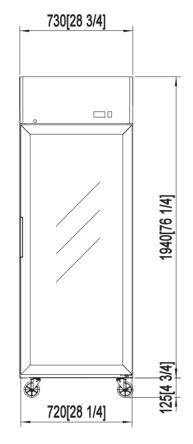



| Model          | Refrigerant | Doors | Shelves |      | Dimension<br>(mm)<br>(inch) |      |       | Voltage | Amps | Capacity<br>(L) | Net<br>Weight<br>(KG) | Temperature<br>Range |
|----------------|-------------|-------|---------|------|-----------------------------|------|-------|---------|------|-----------------|-----------------------|----------------------|
|                |             |       |         | L    | D                           | Н    |       |         |      | (Cu Ft.)        | (LBS)                 | Kange                |
| C1-<br>29GDSVC | R290        | 1     | 4 –     | 730  | 805                         | 2065 | — 1/6 | 115/60  | 2.1  | 606             | 115                   | 1 ~ 8°C              |
|                |             |       |         | 28.7 | 31.7                        | 81.3 | — 170 |         |      | 21.4            | 253                   | 33 ~ 45°F            |

Equipped with one NEMA 5-15P plug (



### **Shipping Information**

| Cı   | rate Dimens<br>(mm)<br>(inch) | sions | Net Weight<br>(KG) | Gross Weight<br>(KG) |  |  |
|------|-------------------------------|-------|--------------------|----------------------|--|--|
| L    | D                             | Н     | (LBS)              | (LBS)                |  |  |
| 826  | 889                           | 2154  | 152                | 168                  |  |  |
| 32.5 | 35                            | 84.8  | 335                | 370                  |  |  |

Specifications subject to change without notice.

